




# Velocity Micro Cruz T301 Speakers Replacement

Replacing your defective speakers for optimum sound quality.

Written By: Ali Rashid Al Araimi

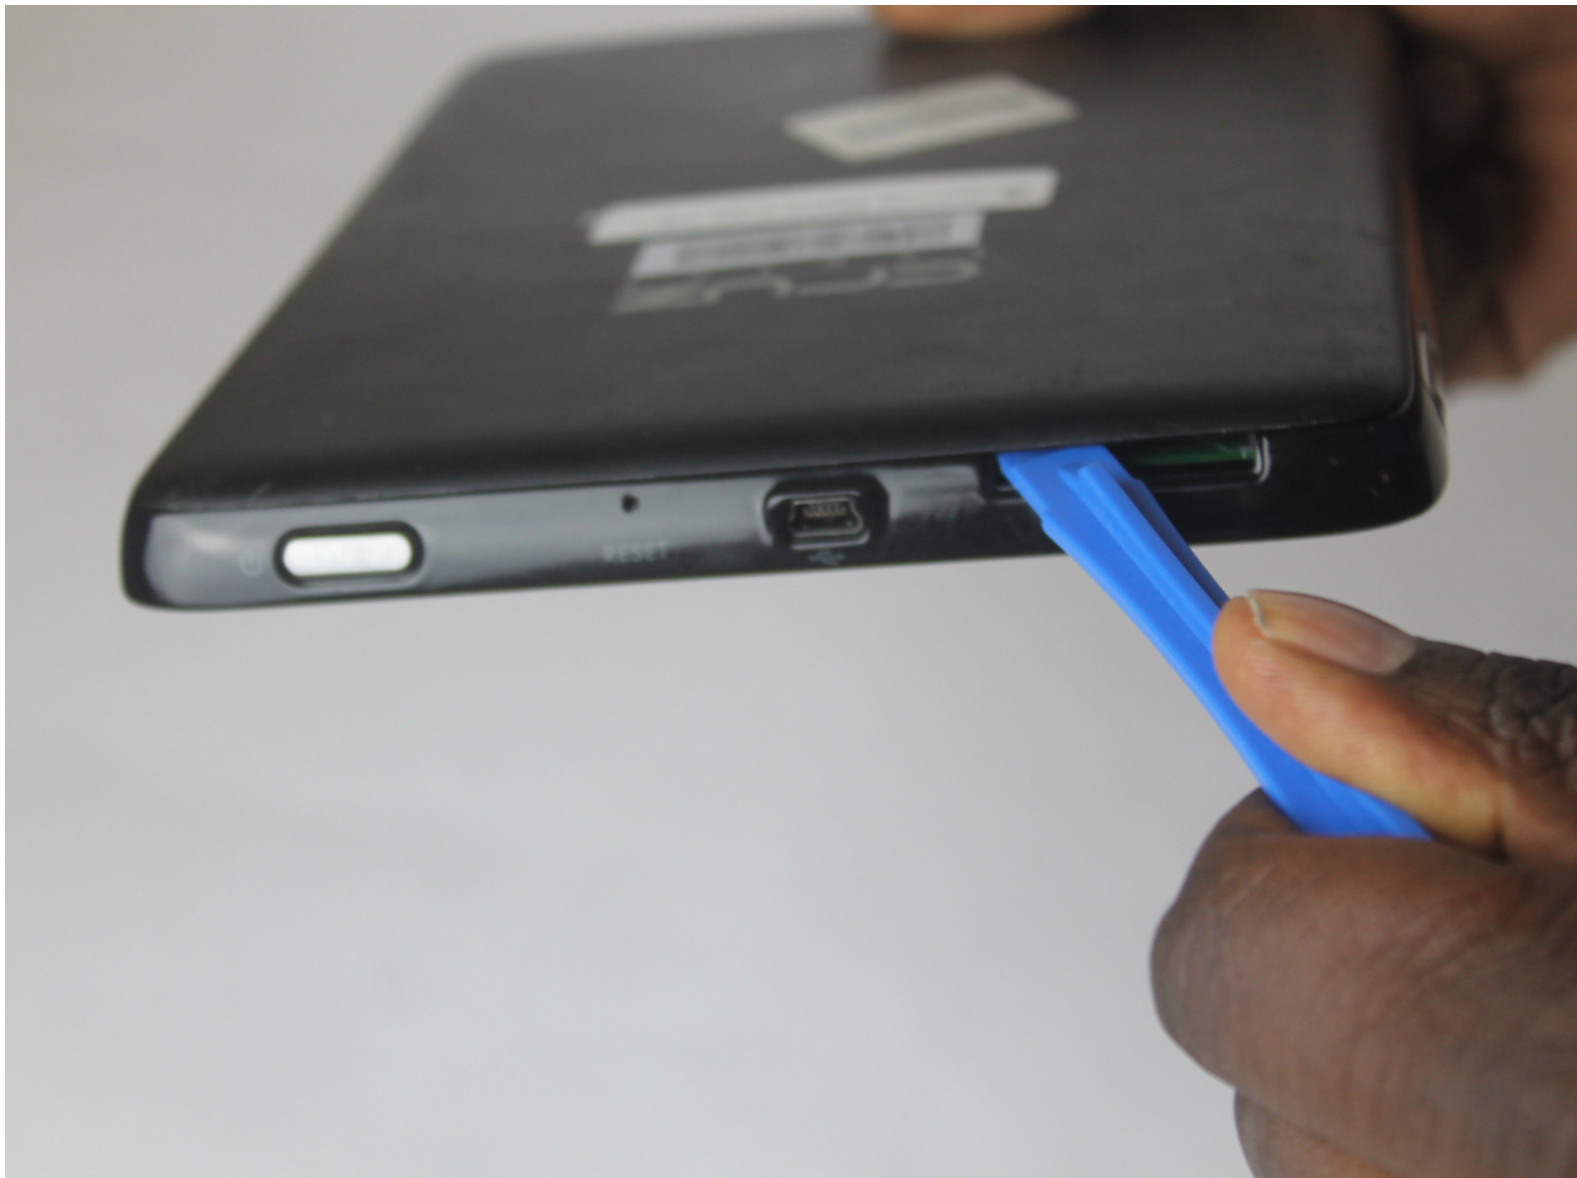

## INTRODUCTION

If you want to replace speakers of your velocity micro T301 tablet, please follow the steps in this guide to get it done.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Metal Spudger](#) (1)
  - [Heavy-Duty Spudger](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Speakers



- Insert the plastic opening tool in the SD port. The edge point should be pointed towards the rear panel.

## Step 2




- Insert a small opening tool between the rear panel and the tablet.

### Step 3



- The large opening tool is not needed any more.


### Step 4

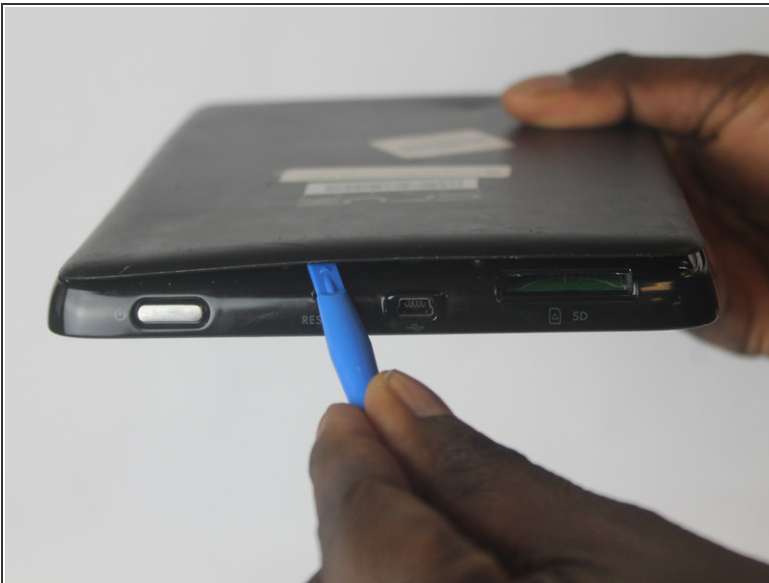

- Move the small tool opener around the rear panel to free the 12 edges.




## Step 5

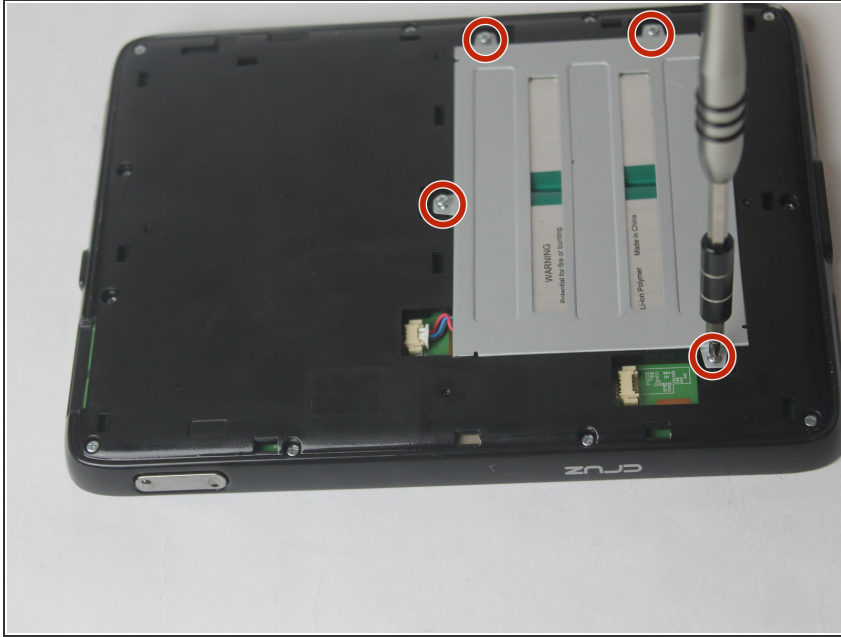


- Using PH0 Phillips Driver, remove the 4 Screws in the Metal part.

## Step 6

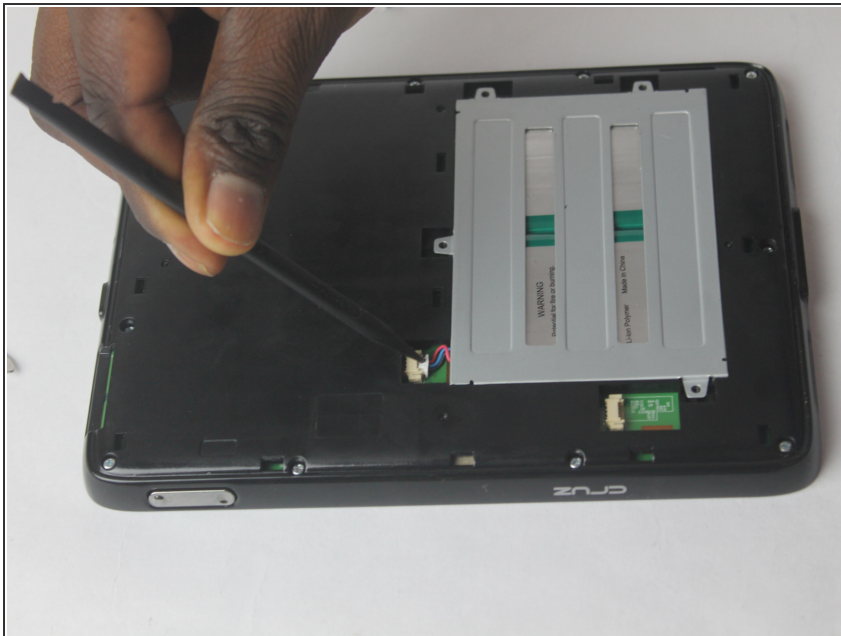

- Using a plastic Spudger remove the battery connector.

## Step 7

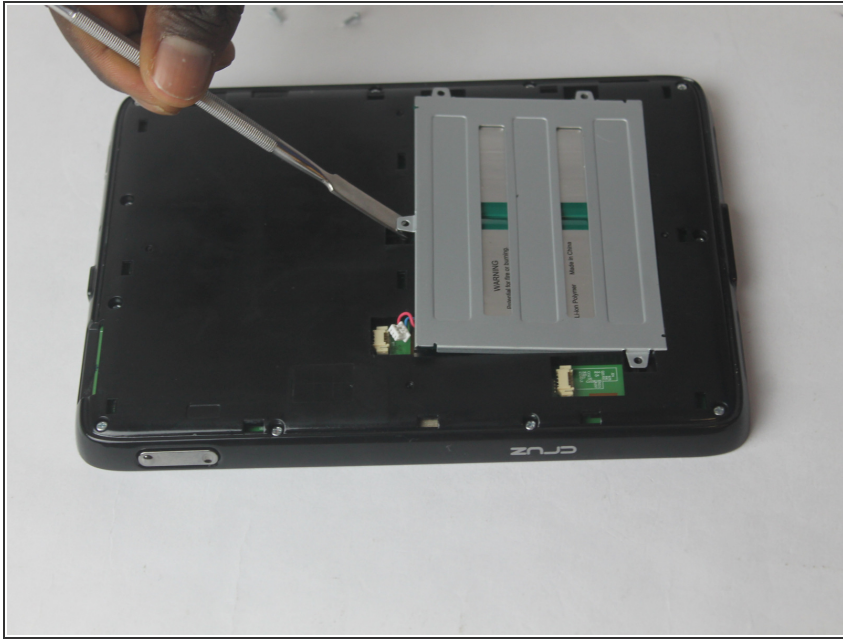

- Lift the battery out of its place.

## Step 8



- Using PH0 Phillips Driver, remove the 12 Screws in the cover.

## Step 9



- Place a metal Spudger between the tablet and the back cover.


## Step 10



- Move the spudger around the tablet to release the clips attached to the tablet.



## Step 11

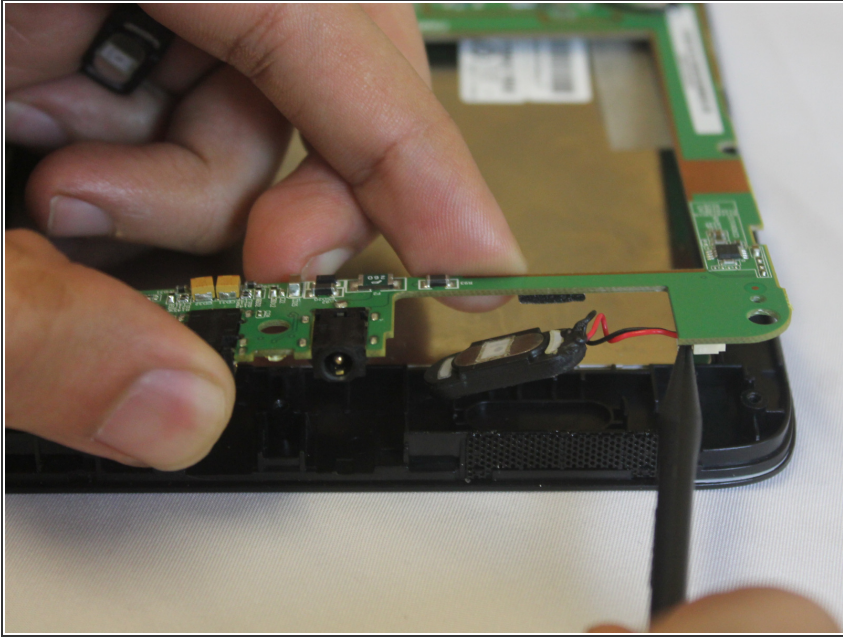

- Use a plastic spudger to release the connection between the speakers and the motherboard as shown in the picture.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-11 08:55:00 PM.